


Chapter 8

ARP and RARP

CONTENTS


- **ARP**
- **ARP PACKAGE**
- **RARP**

ARP and RARP

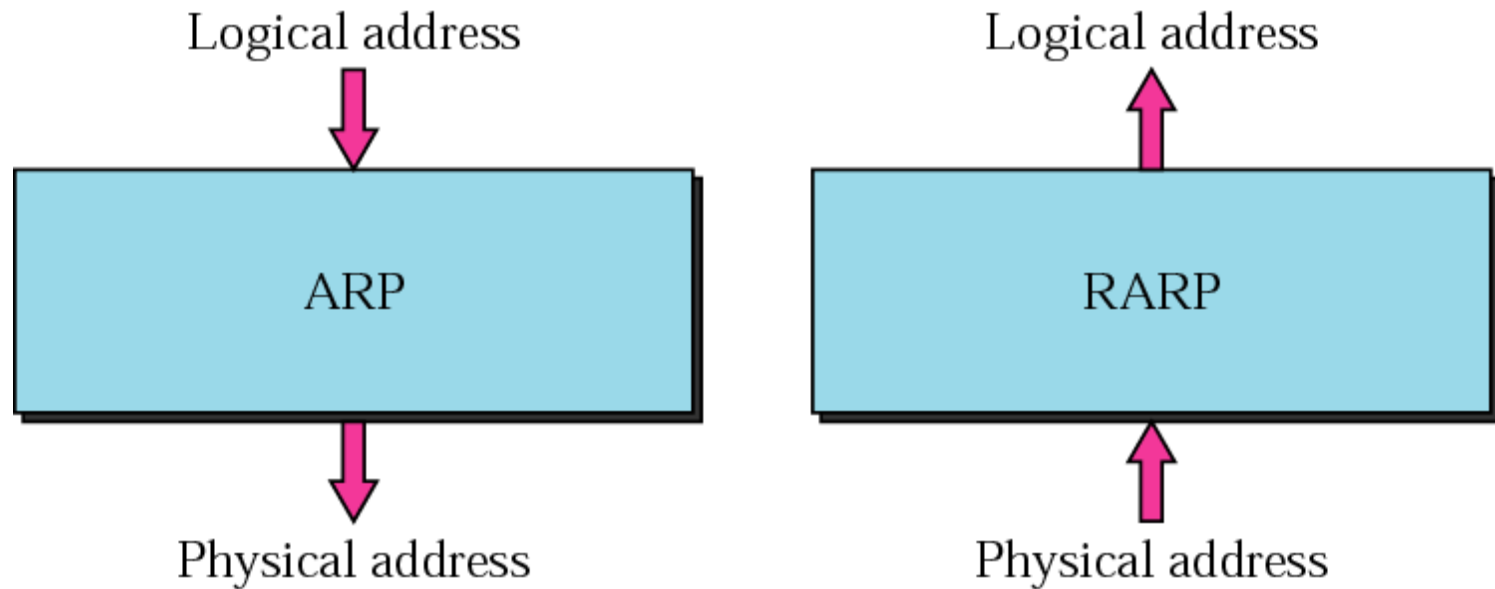


Position of ARP and RARP in TCP/IP protocol suite


Network
layer

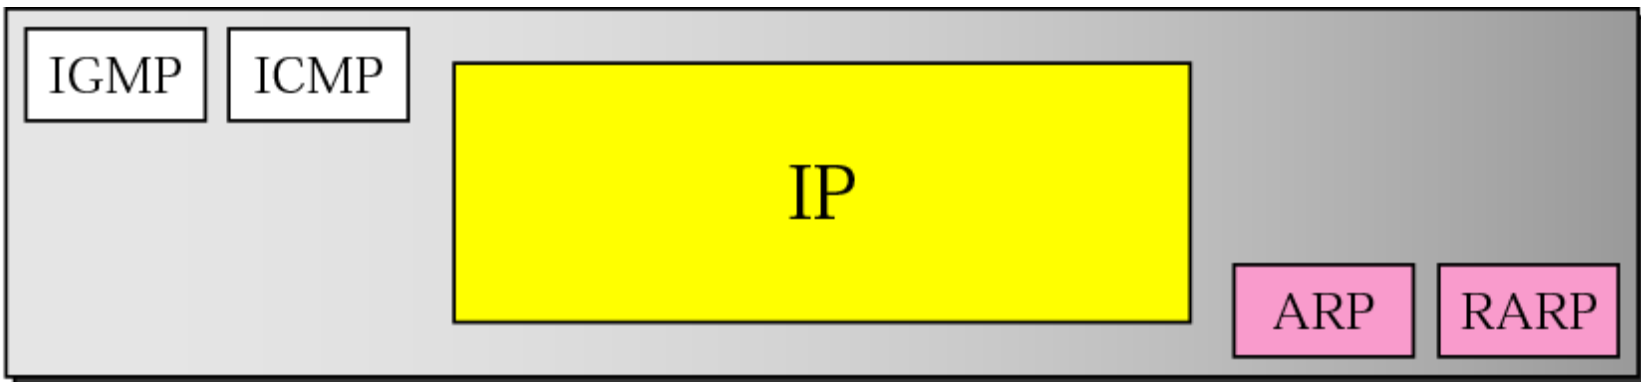


ARP

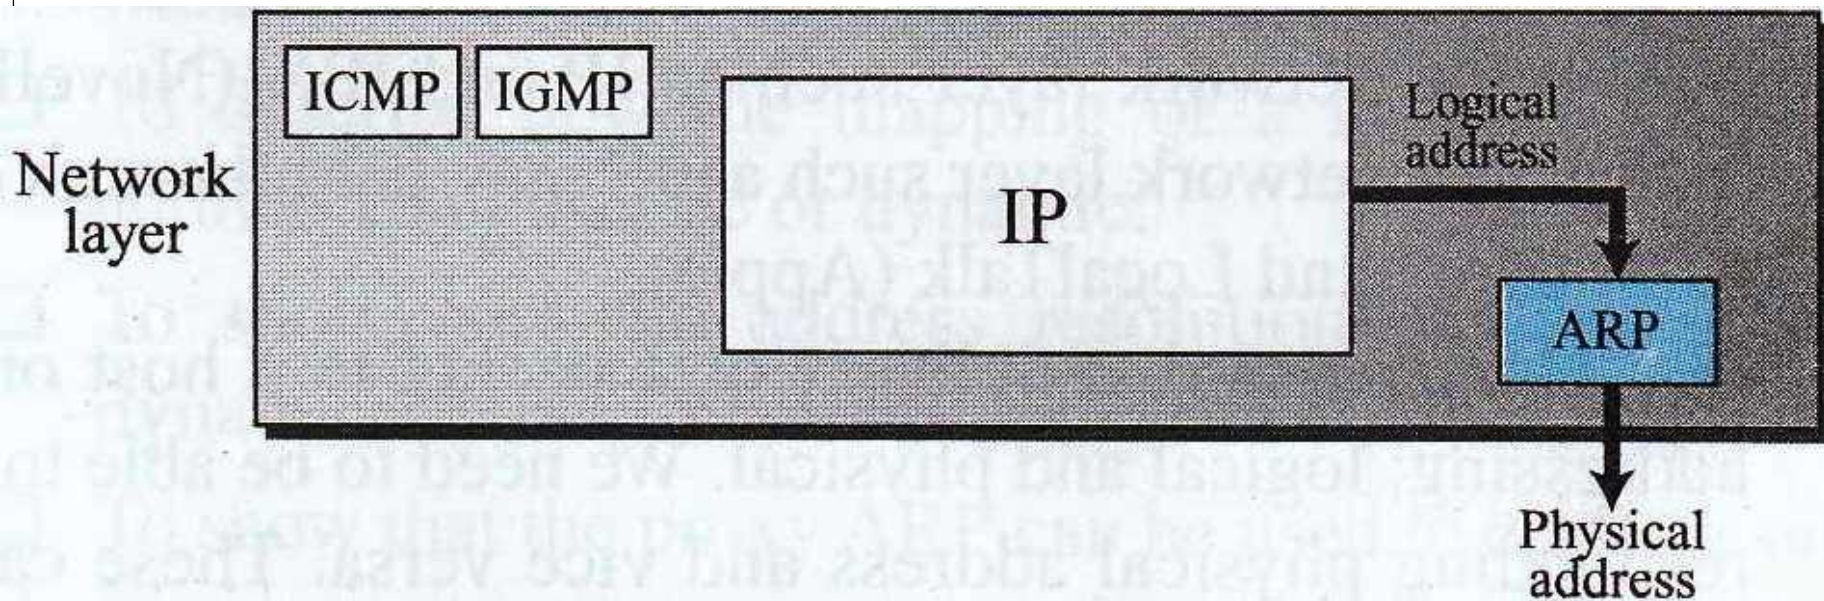

ARP operation

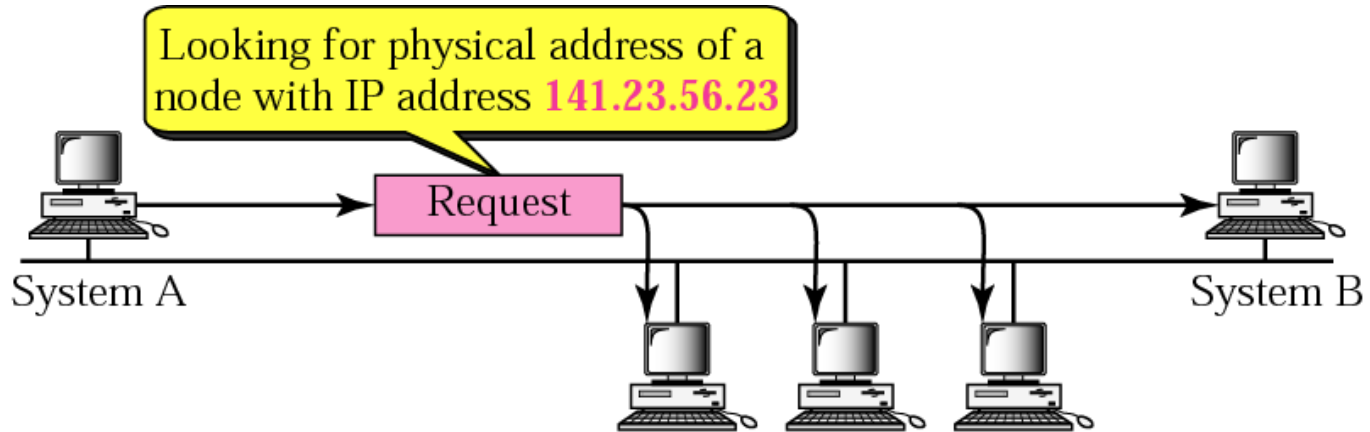

a. ARP request is broadcast

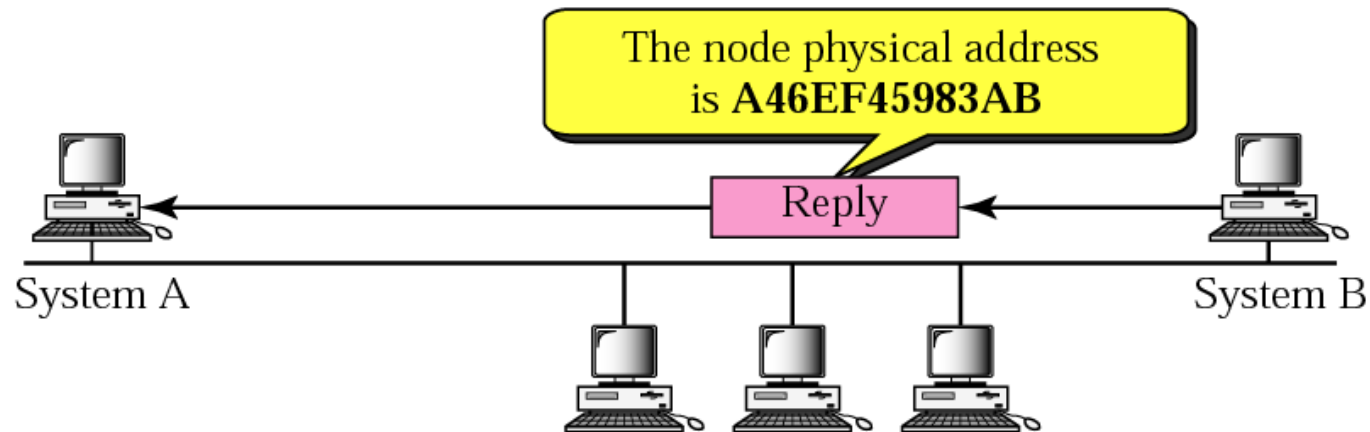


b. ARP reply is unicast

ARP packet

Hardware Type		Protocol Type
Hardware length	Protocol length	Operation Request 1, Reply 2
Sender hardware address (For example, 6 bytes for Ethernet)		
Sender protocol address (For example, 4 bytes for IP)		
Target hardware address (For example, 6 bytes for Ethernet) (It is not filled in a request)		
Target protocol address (For example, 4 bytes for IP)		


Encapsulation of ARP packet

Type: 0x0806

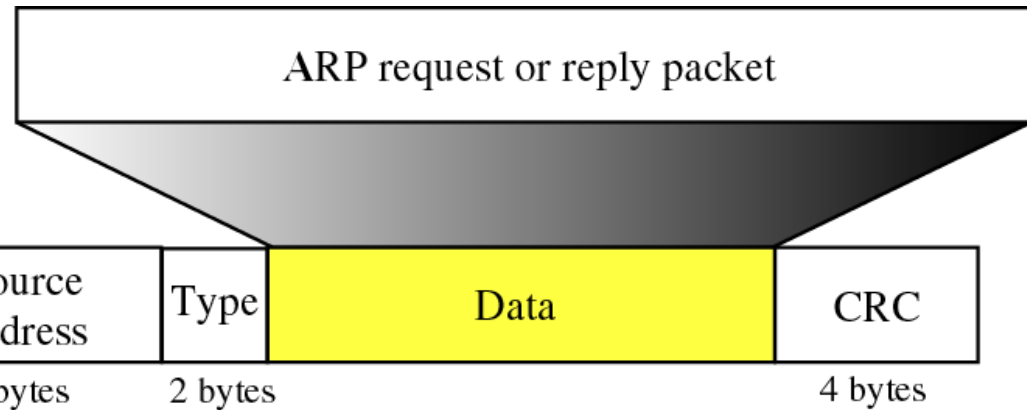


Four cases using ARP

Target IP address:
Destination address in the IP datagram

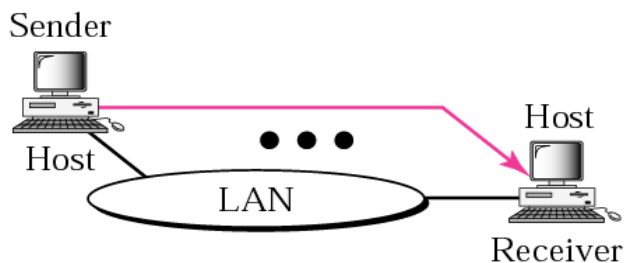


Case 1. A host has a packet to send to another host on the same network.

Target IP address:
IP address of a router

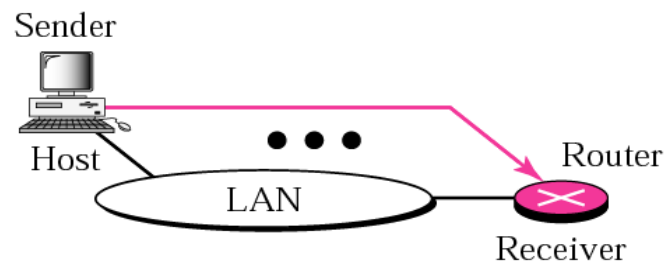


Case 2. A host wants to send a packet to another host on another network. It must first be delivered to a router.

Target IP address:
IP address of the appropriate router found in the routing table

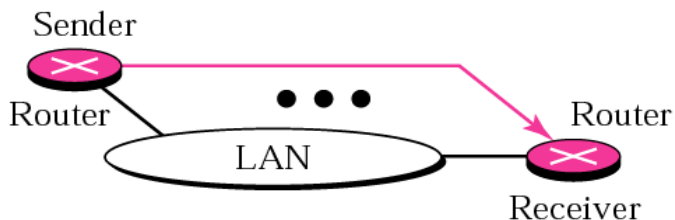

Case 3. A router receives a packet to be sent to a host on another network. It must first be delivered to the appropriate router.


Target IP address:
Destination address in the IP datagram

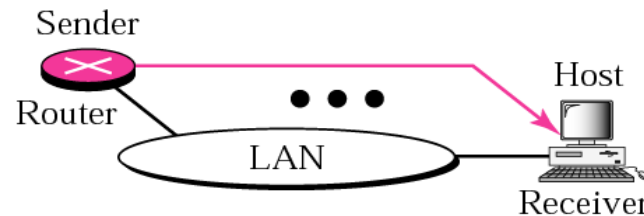


Case 4. A router receives a packet to be sent to a host on the same network.

Four cases using ARP


Target IP address:
Destination address in the IP datagram

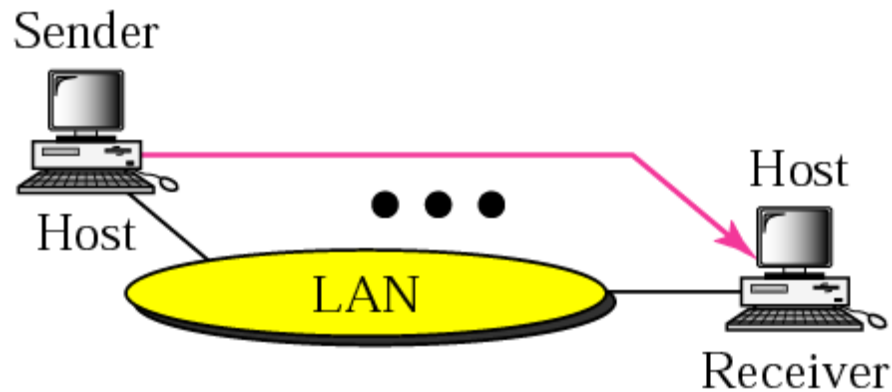


Case 1. A host has a packet to send to another host on the same network.

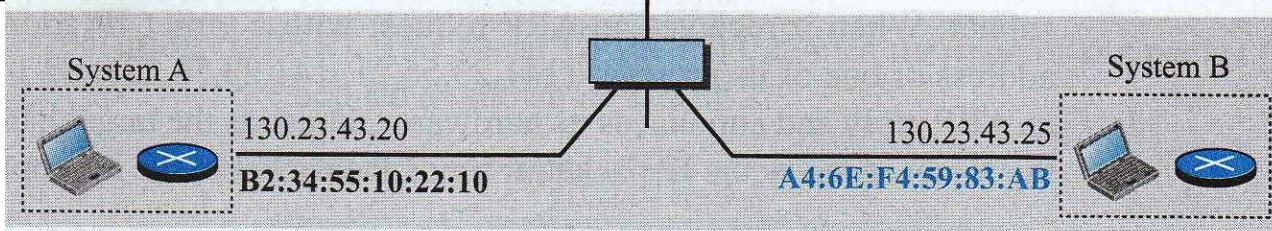

From A to B

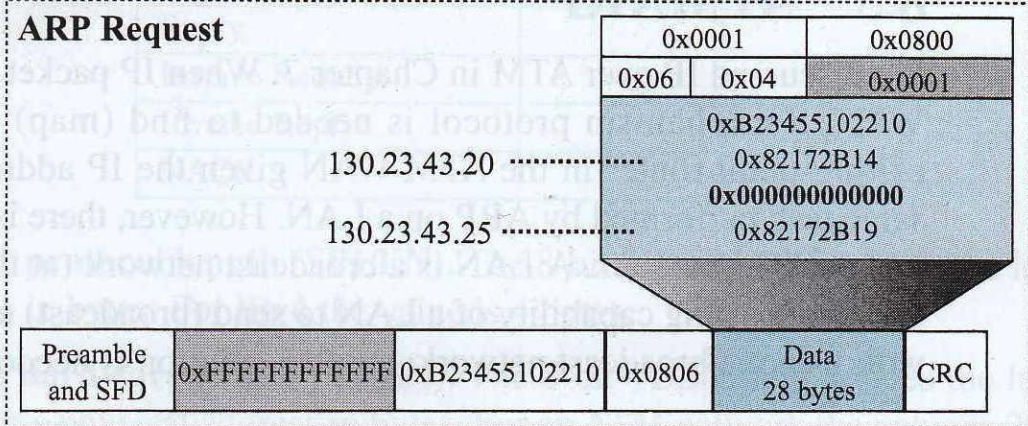


From B to A

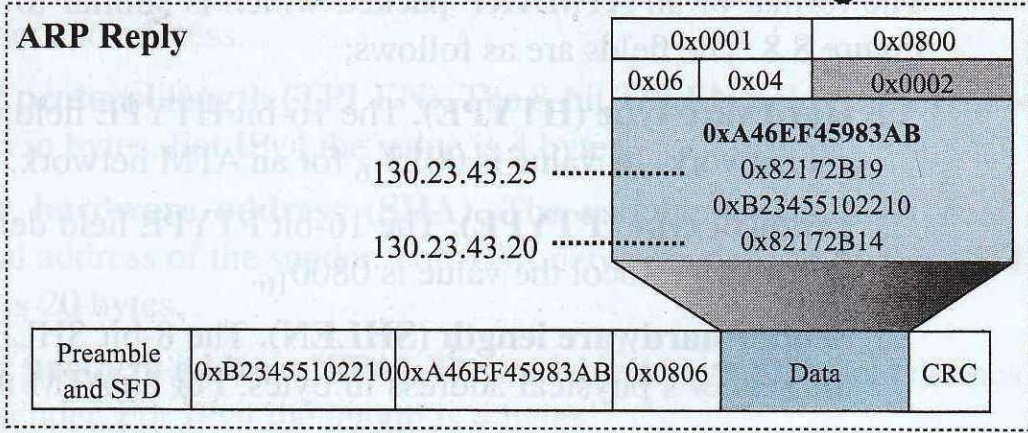

Four cases using ARP


Target IP address:
IP address of a router

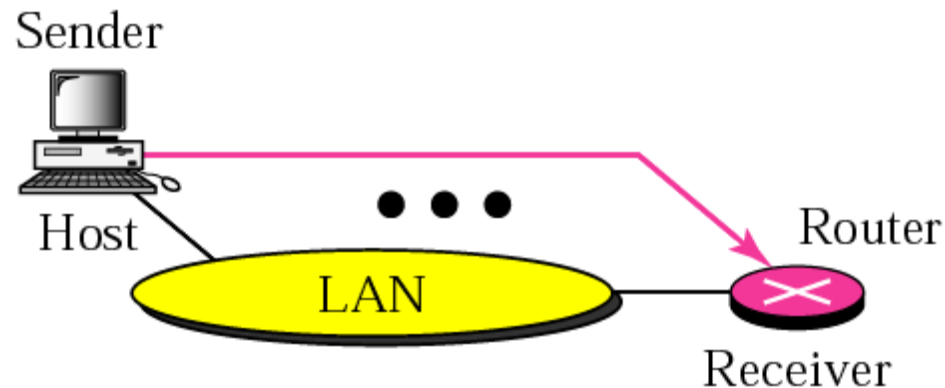

Case 2. A host wants to send a packet to another host on another network.
It must first be delivered to a router.

Four cases using ARP

Target IP address:
IP address of the appropriate router
found in the routing table

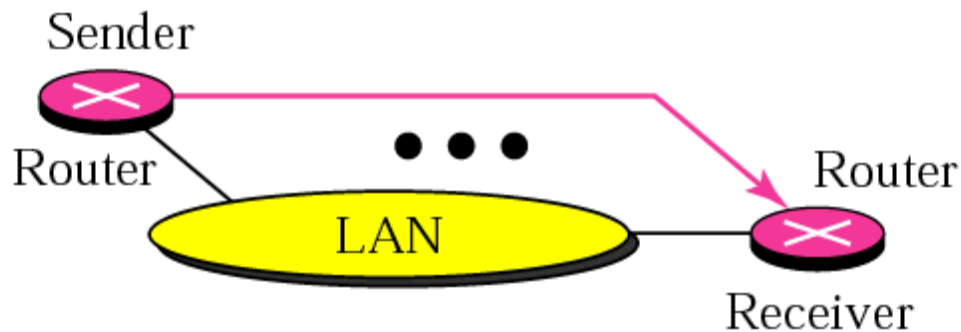


Case 3. A router receives a packet to be sent to a host on another network.

It must first be delivered to the appropriate router.

Four cases using ARP

Target IP address:
Destination address in the IP datagram

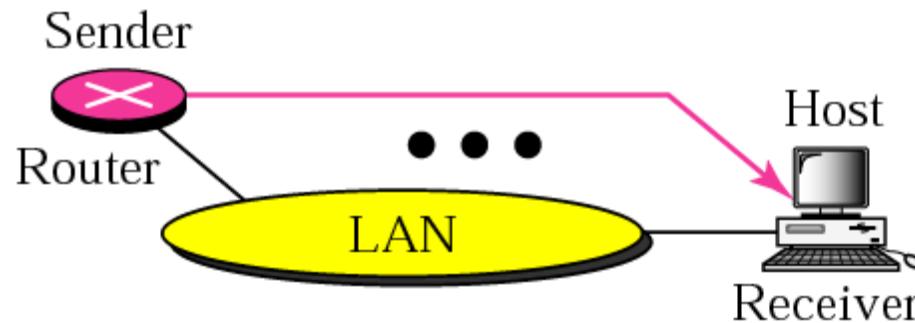

Case 4. A router receives a packet to be sent to a host on the same network.

Note

*An ARP request is **broadcast**;
an ARP reply is **unicast**.*


Example 1

A host with IP address 130.23.43.20 and physical address 0xB23455102210 has a packet to send to another host with IP address 130.23.43.25 and physical address 0xA46EF45983AB. The two hosts are on the same Ethernet network. Show the ARP request and reply packets encapsulated in Ethernet frames.


Solution

Figure 7.7 shows the ARP request and reply packets. Note that the ARP data field in this case is 28 bytes, and that the individual addresses do not fit in the 4-byte boundary.


Example 1

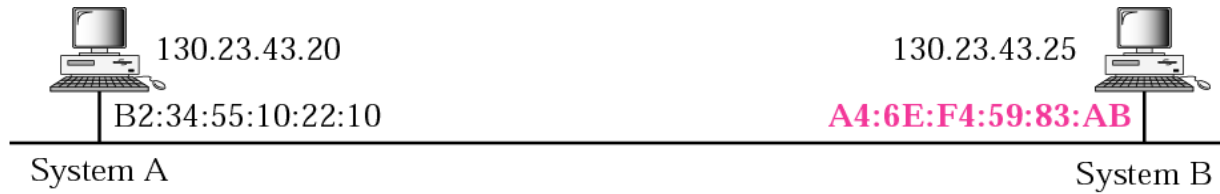

0x0001		0x0800
0x06	0x04	0x0001
0xB23455102210		
0x82172B14		← 130.23.43.20
0x000000000000		
0x82172B19		← 130.23.43.25



0x0001		0x0800
0x06	0x04	0x0002
0xA46EF45983AB		
0x82172B19		
0xB23455102210		
0x82172B14		



Proxy ARP

The proxy ARP router replies to any ARP request received for destinations 141.23.56.21, 141.23.56.22, and 141.23.56.23.

141.23.56.21 141.23.56.22 141.23.56.23



Added subnetwork



Proxy ARP router




Request

Router or host



ARP PACKAGE

ARP components

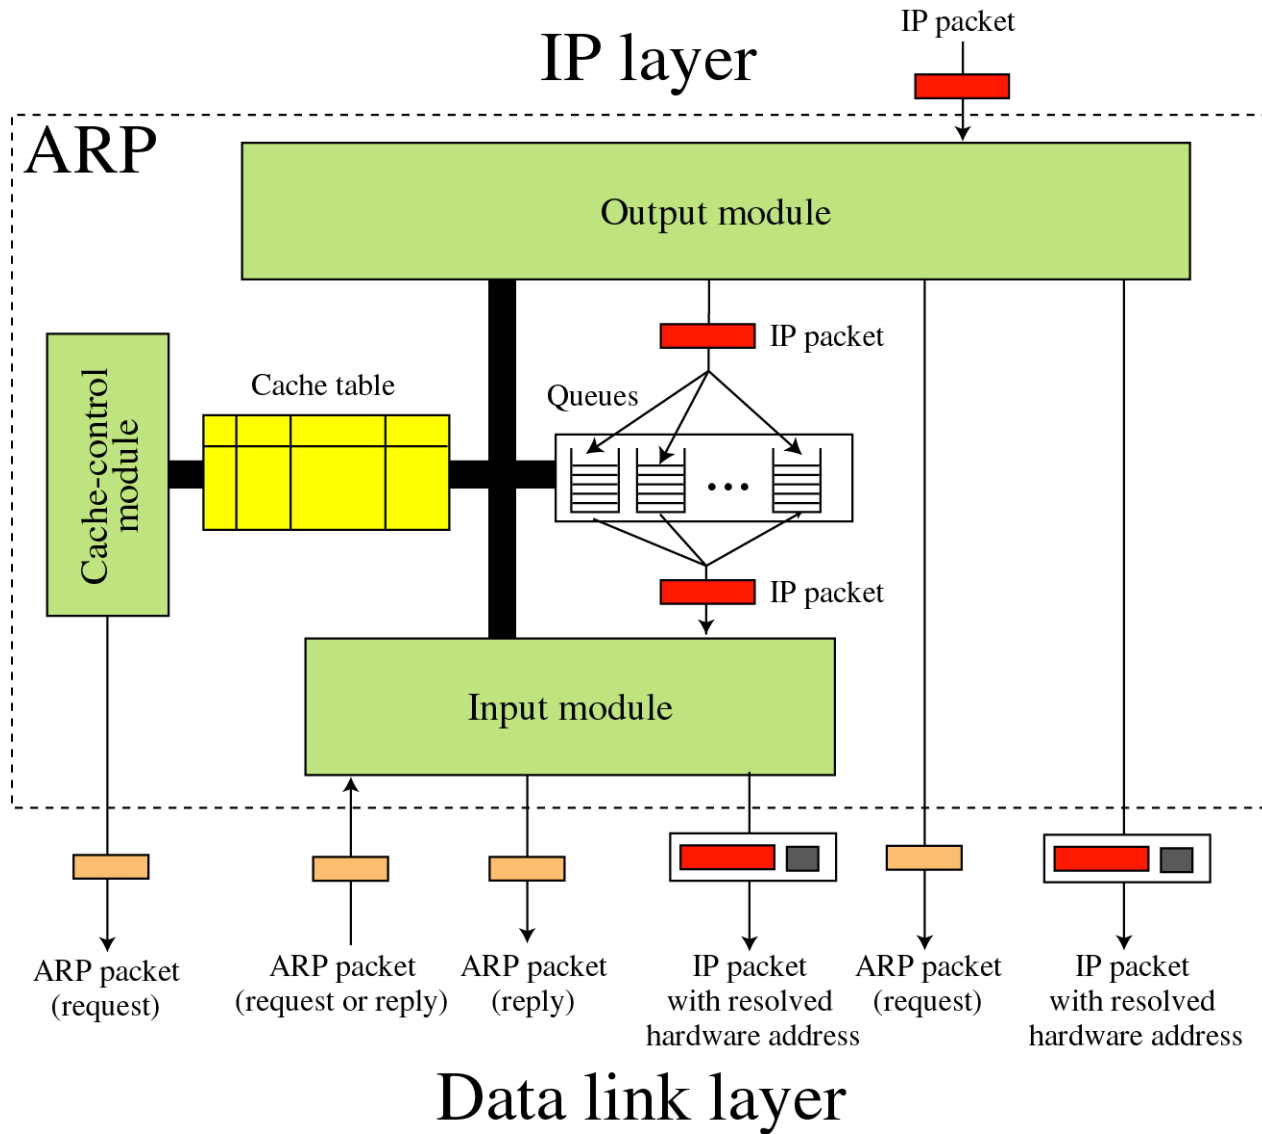

RARP

Original cache table used for examples

<i>State</i>	<i>Queue</i>	<i>Attempt</i>	<i>Time-Out</i>	<i>Protocol Addr.</i>	<i>Hardware Addr.</i>
R	5		900	180.3.6.1	ACAE32457342
P	2	2		129.34.4.8	
P	14	5		201.11.56.7	
R	8		450	114.5.7.89	457342ACAE32
P	12	1		220.55.5.7	
F					
R	9		60	19.1.7.82	4573E3242ACA
P	18	3		188.11.8.71	



EXAMPLE 2

The ARP output module receives an IP datagram (from the IP layer) with the destination address 114.5.7.89. It checks the cache table and finds that an entry exists for this destination with the RESOLVED state (R in the table). It extracts the hardware address, which is 457342ACAE32, and sends the packet and the address to the data link layer for transmission. The cache table remains the same.



EXAMPLE 3

Twenty seconds later, the ARP output module receives an IP datagram (from the IP layer) with the destination address 116.1.7.22. It checks the cache table and does not find this destination in the table. The module adds an entry to the table with the state PENDING and the Attempt value 1. It creates a new queue for this destination and enqueues the packet. It then sends an ARP request to the data link layer for this destination. The new cache table is shown in Table 7.2.

See Next Slide

Updated cache table for Example 3

<i>State</i>	<i>Queue</i>	<i>Attempt</i>	<i>Time-Out</i>	<i>Protocol Addr.</i>	<i>Hardware Addr.</i>
R	5		900	180.3.6.1	ACAE32457342
P	2	2		129.34.4.8	
P	14	5		201.11.56.7	
R	8		450	114.5.7.89	457342ACAE32
P	12	1		220.55.5.7	
P	23	1		116.1.7.22	
R	9		60	19.1.7.82	4573E3242ACA
P	18	3		188.11.8.71	



EXAMPLE 4

Fifteen seconds later, the ARP input module receives an ARP packet with target protocol (IP) address 188.11.8.71. The module checks the table and finds this address. It changes the state of the entry to RESOLVED and sets the time-out value to 900. The module then adds the target hardware address (E34573242ACA) to the entry. Now it accesses queue 18 and sends all the packets in this queue, one by one, to the data link layer. The new cache table is shown in Table 7.3.

See Next Slide

Updated cache table for Example 4

<i>State</i>	<i>Queue</i>	<i>Attempt</i>	<i>Time-Out</i>	<i>Protocol Addr.</i>	<i>Hardware Addr.</i>
R	5		900	180.3.6.1	ACAE32457342
P	2	2		129.34.4.8	
P	14	5		201.11.56.7	
R	8		450	114.5.7.89	457342ACAE32
P	12	1		220.55.5.7	
P	23	1		116.1.7.22	
R	9		60	19.1.7.82	4573E3242ACA
R	18		900	188.11.8.71	E34573242ACA



EXAMPLE 5


Twenty-five seconds later, the cache-control module updates every entry. The time-out values for the first three resolved entries are decremented by 60. The time-out value for the last resolved entry is decremented by 25. The state of the next-to-the last entry is changed to FREE because the time-out is zero. For each of the three pending entries, the value of the attempts

See Next Slide


Updated cache table for Example 5

<i>State</i>	<i>Queue</i>	<i>Attempt</i>	<i>Time-Out</i>	<i>Protocol Addr.</i>	<i>Hardware Addr.</i>
R	5		840	180.3.6.1	ACAE32457342
P	2	3		129.34.4.8	
F					
R	8		390	114.5.7.89	457342ACAE32
P	12	2		220.55.5.7	
P	23	2		116.1.7.22	
F					
R	18		875	188.11.8.71	E34573242ACA

RARP operation

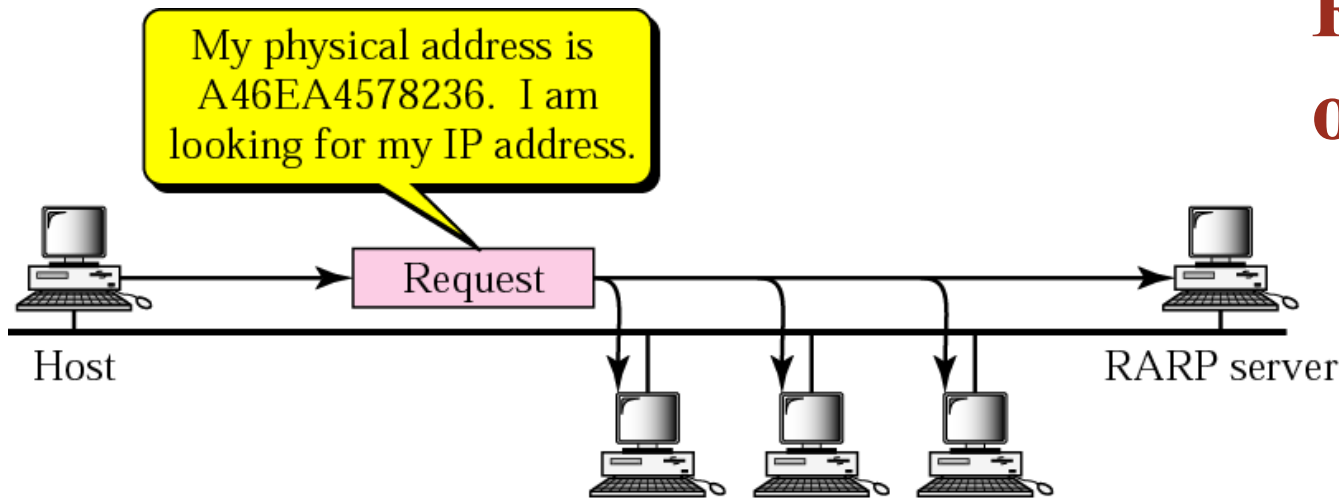

a. RARP request is broadcast

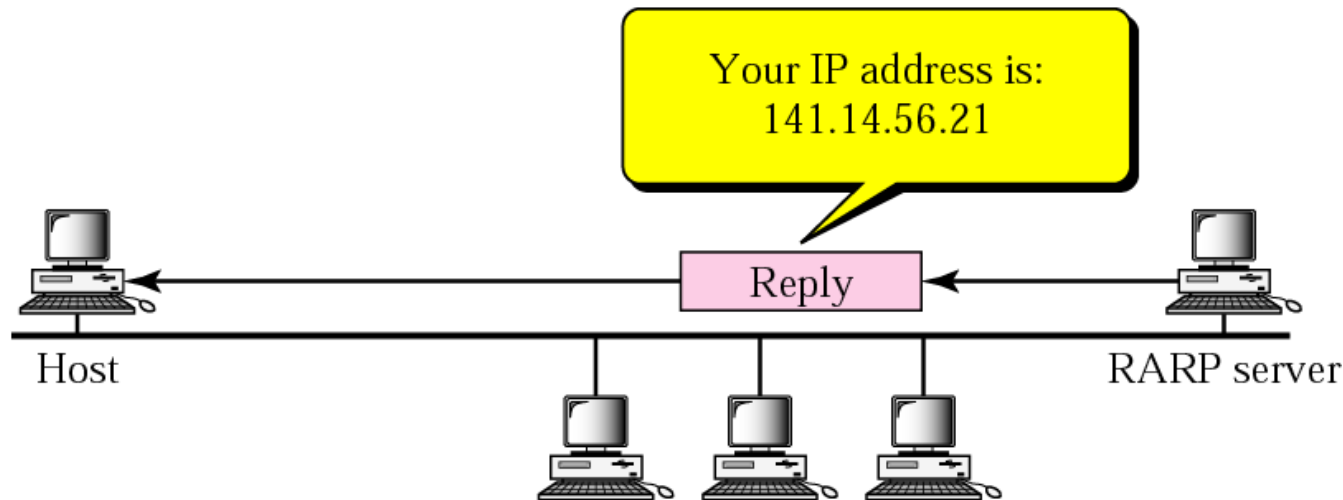

b. RARP reply is unicast

Note


*The RARP request packets are
broadcast;
the RARP reply packets are
unicast.*

RARP packet

Hardware type		Protocol type
Hardware length	Protocol length	Operation Request 3, Reply 4
Sender hardware address (For example, 6 bytes for Ethernet)		
Sender protocol address (For example, 4 bytes for IP) (It is not filled for request)		
Target hardware address (For example, 6 bytes for Ethernet) (It is not filled for request)		
Target protocol address (For example, 4 bytes for IP) (It is not filled for request)		

Encapsulation of RARP packet

Type: 0x8035

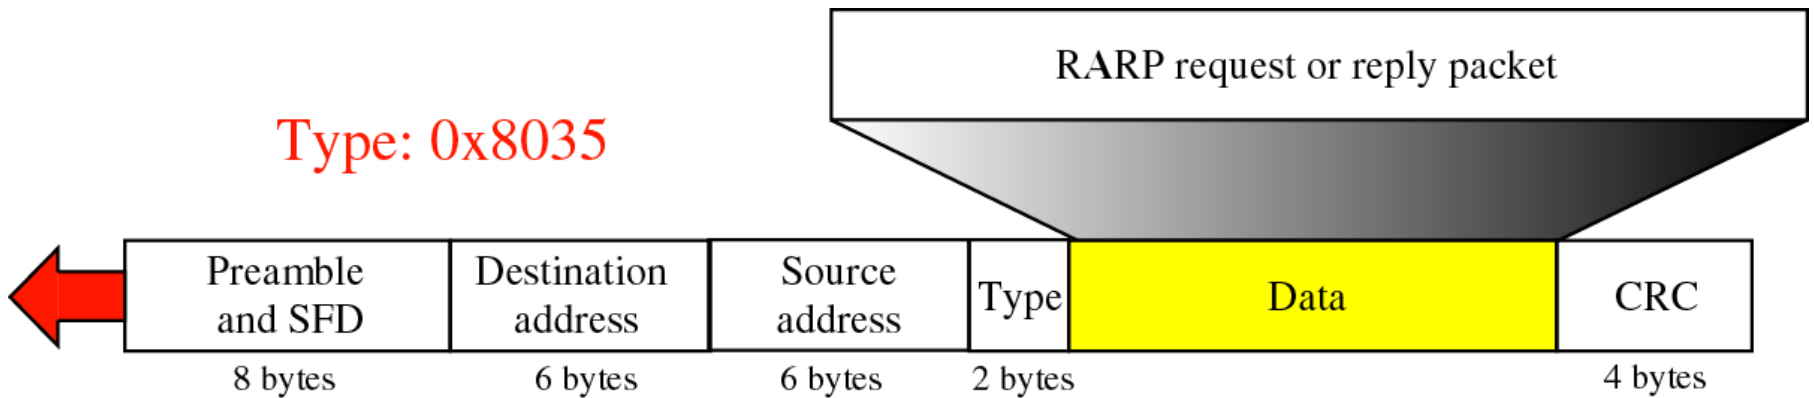

Alternative Solutions to RARP

When a diskless computer is booted, it needs more information in addition to its IP address. It needs to know its subnet mask, the IP address of a router, and the IP address of a name server. RARP cannot provide this extra information. New protocols have been developed to provide this information. In Chapter 17 we discuss two protocols, BOOTP and DHCP, that can be used instead of RARP.